

DATA SHEET

PRODUCT **CHIP INDUCTORS**

SERIES WCA1608CP

PART NO. _____

DESCRIPTION _____

ISSUE DATE 2023/07/18

REVISION DATE 2023/07/18

REFERENCE NO. ENS000181190

RoHS COMPLIANCE ITEM

Disclaimer:


- This datasheet is downloaded from the Website of Walsin Technology Corporation, and Walsin Technology Corporation reserves all rights for modification content without further notification.
- All product, specification and data are subject to change without notice.
- Walsin Technology Corporation, its affiliates, agents, employees, and all persons acting on its or their behalf, hereby disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics.
- Walsin Technology Corporation makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. It is the customer's responsibility to validate that a particular product is suitable for use in a particular application.
- To the maximum extent permitted by applicable law, Walsin Technology Corporation disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- If you have any questions, please contact our sales staff.

CHIP INDUCTORS Engineering Specification

1. Scope


- Ceramic core wire wound construction.
- Excellent inductance accuracy.
- Inductance values from 1.6 to 470 nH.
- Exceptional Q and high SRF special for high frequency applications..
- High reliability tests comply with AEC-Q200.

2. Explanation of Part Number

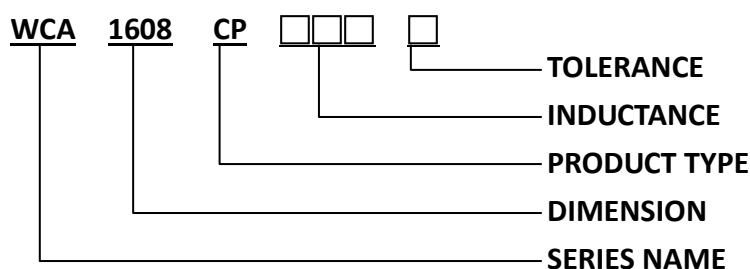


3. Shapes and Dimensions

. UNIT: mm

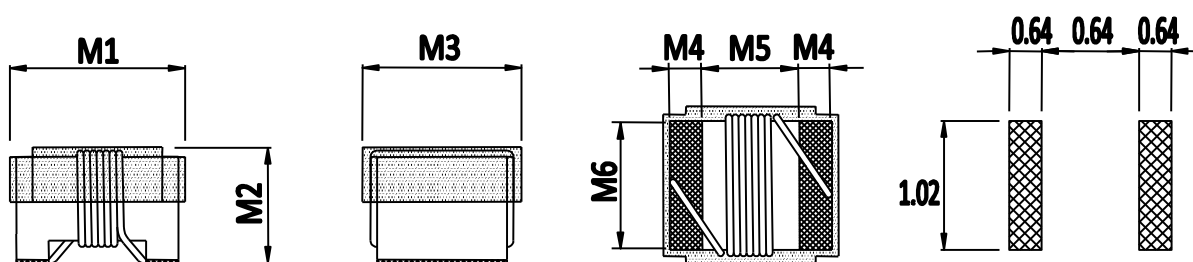

Series	M1	M2	M3	M4	M5	M6
WCA1608CP	1.8 MAX.	1.02 MAX.	1.12 MAX.	0.28±0.1	0.96±0.1	0.76±0.1

4. Marking



Marking Direction: PAD is on the left and right, the color code is centered.

Example: WCA1608CP1N8□

MARKING: BROWN

MARK COLOR CODE IN COMPOSITE ELECTRICAL SPECIFICATION.

5. Electrical Specification



Part number	Inductance (nH)	Inductance Tolerance	Q MIN.	Test Frequency (MHz)	SRF (MHz) MIN.	DC Resistance (Ω) MAX.	Irms (mA)	COLOR CODE
WCA1608CP1N6□	1.6	K,J	24	250	12500	0.030	700	BLACK
WCA1608CP1N8□	1.8	K,J	16	250	12500	0.045	700	BROWN
WCA1608CP2N1□	2.1	K,J	20	250	5800	0.050	700	RED
WCA1608CP2N2□	2.2	K,J	20	250	5800	0.100	700	ORANGE
WCA1608CP3N3□	3.3	K,J	20	250	5500	0.070	700	VIOLET
WCA1608CP3N6□	3.6	K,J	22	250	5900	0.063	700	RED
WCA1608CP3N9□	3.9	K,J	22	250	6900	0.080	700	ORANGE
WCA1608CP4N3□	4.3	K,J	22	250	5900	0.063	700	YELLOW
WCA1608CP4N7□	4.7	K,J	20	250	5800	0.116	700	GREEN
WCA1608CP5N1□	5.1	K,J	20	250	5700	0.140	700	BLUE
WCA1608CP5N6□	5.6	K,J	15	250	5800	0.150	700	GRAY
WCA1608CP6N1□	6.1	K,J	25	250	5800	0.110	700	WHITE
WCA1608CP6N3□	6.3	J,G	25	250	5800	0.110	700	GRAY
WCA1608CP6N8□	6.8	K,J,G	27	250	5800	0.110	700	VIOLET
WCA1608CP7N2□	7.2	K,J,G	28	250	4800	0.106	700	BLACK
WCA1608CP7N5□	7.5	K,J,G	28	250	4800	0.106	700	GRAY
WCA1608CP8N2□	8.2	K,J,G	25	250	5800	0.120	700	BLACK
WCA1608CP8N4□	8.4	K,J,G	28	250	4600	0.109	700	RED
WCA1608CP8N5□	8.5	K,J,G	28	250	4600	0.109	700	RED
WCA1608CP8N7□	8.7	J,G	28	250	4600	0.109	700	WHITE
WCA1608CP9N5□	9.5	J,G	28	250	5400	0.135	700	BLACK
WCA1608CP10N□	10	J,G	31	250	4800	0.130	700	BROWN
WCA1608CP11N□	11	J,G	33	250	4000	0.086	700	RED
WCA1608CP12N□	12	J,G	35	250	4000	0.130	700	ORANGE
WCA1608CP13N□	13	J,G	35	250	4000	0.15	700	YELLOW
WCA1608CP14N□	14	J,G	35	250	4000	0.170	700	BROWN
WCA1608CP15N□	15	J,G	35	250	4000	0.170	700	YELLOW
WCA1608CP16N□	16	J,G	34	250	3300	0.104	700	GREEN
WCA1608CP18N□	18	J,G	35	250	3100	0.170	700	BLUE
WCA1608CP20N□	20	J,G	40	250	3000	0.170	700	GREEN
WCA1608CP22N□	22	J,G	38	250	3000	0.190	700	VIOLET
WCA1608CP24N□	24	J,G	37	250	2650	0.135	700	GRAY
WCA1608CP27N□	27	J,G	40	250	2800	0.220	600	WHITE
WCA1608CP30N□	30	J,G	37	250	2250	0.220	600	BLACK
WCA1608CP33N□	33	J,G	40	250	2300	0.220	600	BROWN
WCA1608CP36N□	36	J,G	38	250	2080	0.250	600	RED
WCA1608CP39N□	39	J,G	40	250	2200	0.250	600	ORANGE
WCA1608CP43N□	43	J,G	39	250	2000	0.280	600	YELLOW
WCA1608CP47N□	47	J,G	38	200	2000	0.280	600	GREEN
WCA1608CP51N□	51	J,G	35	200	1900	0.270	600	BROWN
WCA1608CP56N□	56	J,G	38	200	1900	0.310	600	BLUE
WCA1608CP62N□	62	J,G	37	200	1800	0.340	600	GRAY
WCA1608CP68N□	68	J,G	37	200	1700	0.340	600	VIOLET
WCA1608CP72N□	72	J,G	34	150	1700	0.490	400	GRAY
WCA1608CP75N□	75	J,G	34	150	1700	0.52	400	BLUE
WCA1608CP82N□	82	J,G	34	150	1700	0.540	400	WHITE
WCA1608CP91N□	91	J,G	30	150	1700	0.500	400	BROWN
WCA1608CPR10□	100	J,G	34	150	1400	0.580	400	BLACK
WCA1608CPR11□	110	J,G	32	150	1350	0.610	300	BROWN

Part number	Inductance (nH)	Inductance Tolerance	Q MIN.	Test Frequency (MHz)	SRF (MHz) MIN.	DC Resistance (Ω) MAX.	Irms (mA)	COLOR CODE
WCA1608CPR12□	120	J,G	32	150	1300	0.650	300	RED
WCA1608CPR13□	130	J,G	30	150	1400	0.720	300	WHITE
WCA1608CPR15□	150	J,G	28	150	990	0.920	280	ORANGE
WCA1608CPR16□	160	J,G	25	100	1300	1.400	280	BROWN
WCA1608CPR18□	180	J,G	25	100	990	1.250	240	YELLOW
WCA1608CPR20□	200	J,G	25	100	990	1.980	200	RED
WCA1608CPR22□	220	J,G	25	100	900	1.900	200	GREEN
WCA1608CPR26□	260	J,G	25	100	1000	2.000	200	VIOLET
WCA1608CPR27□	270	J,G	24	100	900	2.300	170	BLUE
WCA1608CPR33□	330	J,G	24	100	900	3.90	185	VIOLET
WCA1608CPR39□	390	J,G	25	100	900	4.35	100	GRAY
WCA1608CPR43□	430	J,G	25	100	900	5.000	100	GRAY
WCA1608CPR47□	470	J,G	25	100	600	5.500	80	WHITE


NOTE:

1. □Tolerance: K:±10%、J:±5%、G:±2%
2. MSL: Level 1

6. Electrical Curve

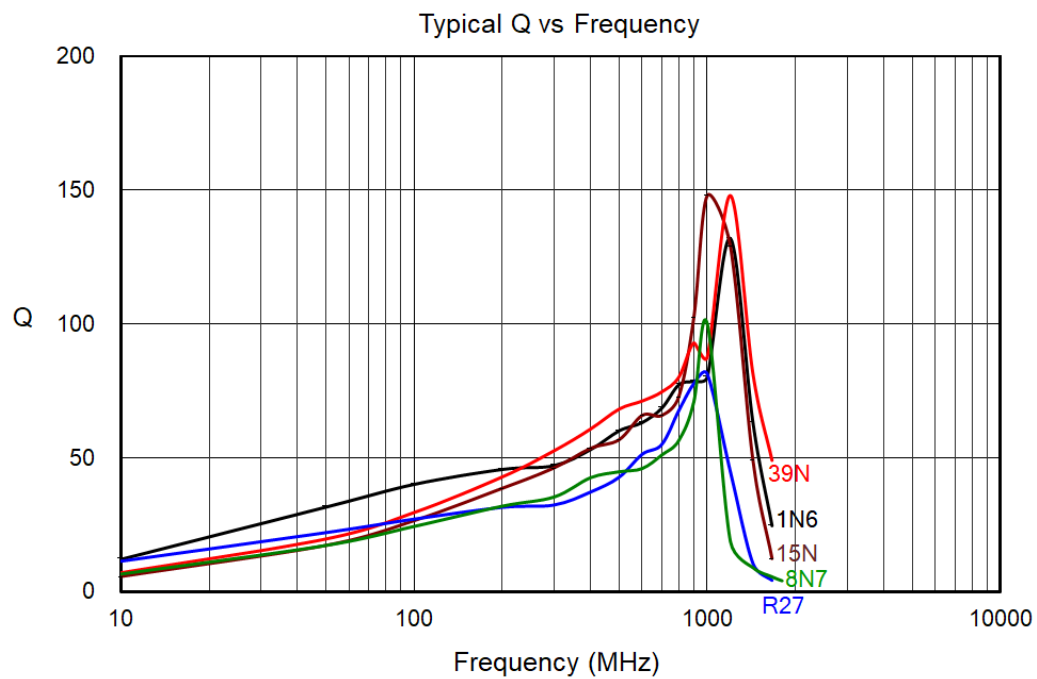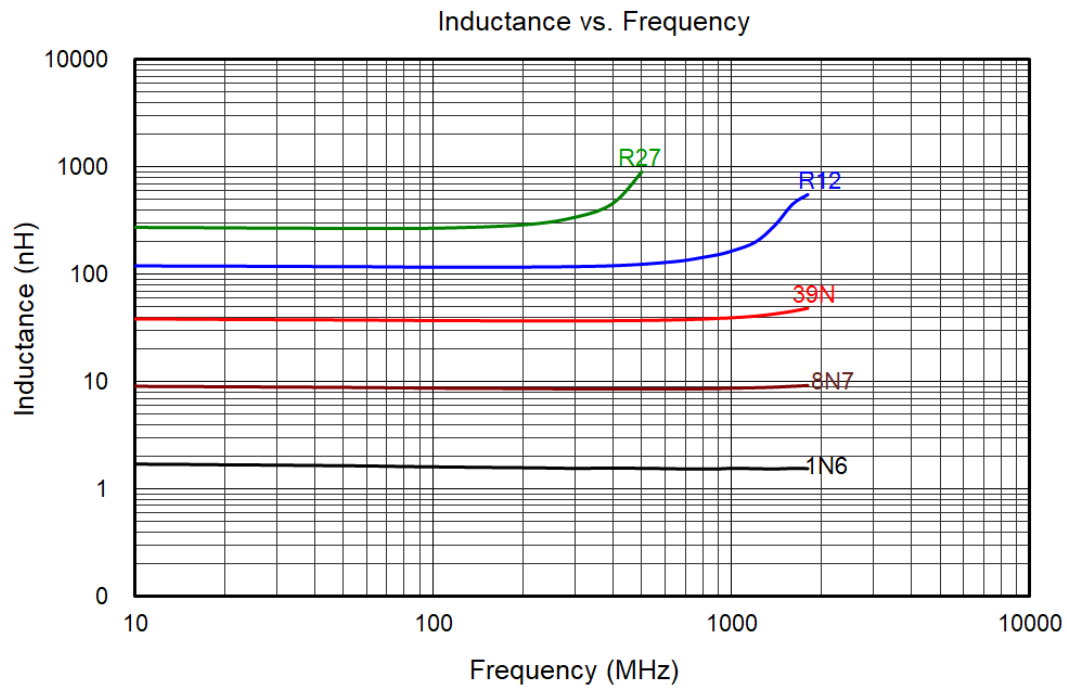


7. Packing

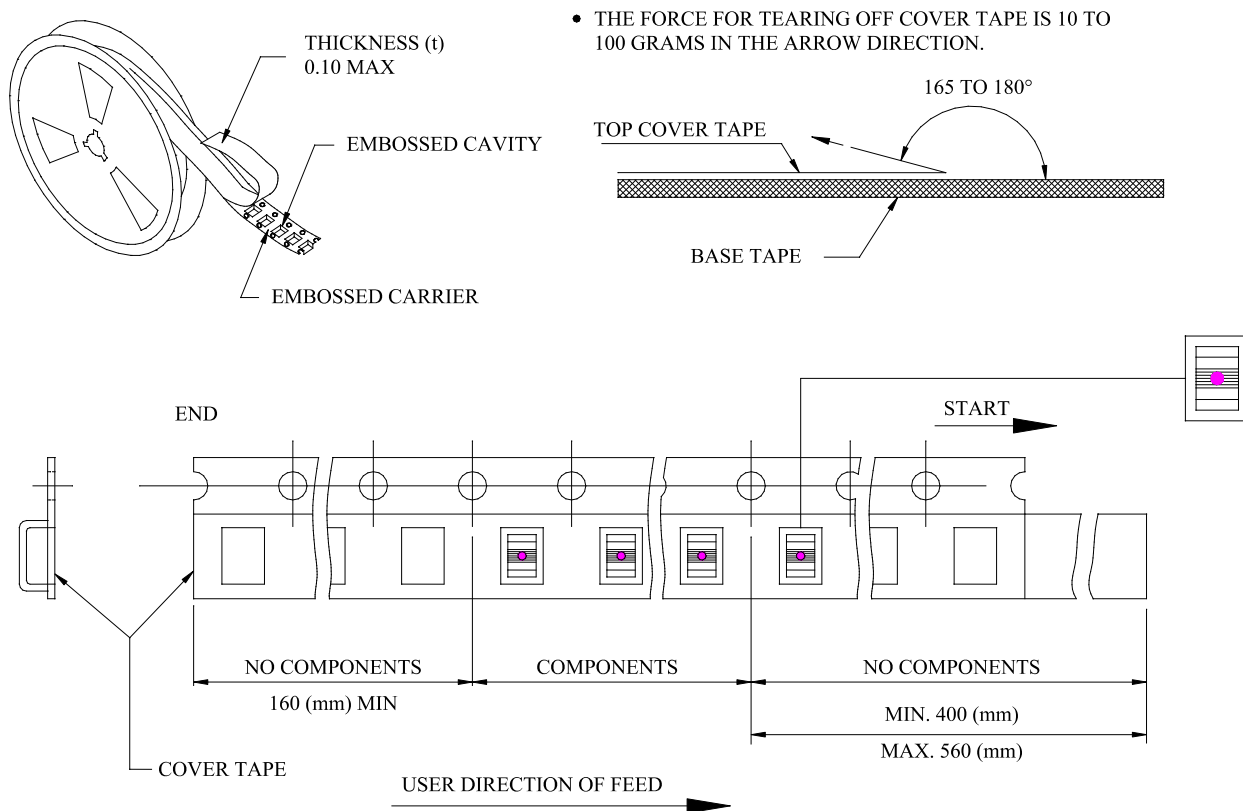

■ CARRIER TAPE REELS (mm)

MATERIAL: PLASTIC

■ DIMENSIONS OF CARRIER TAPE (mm)

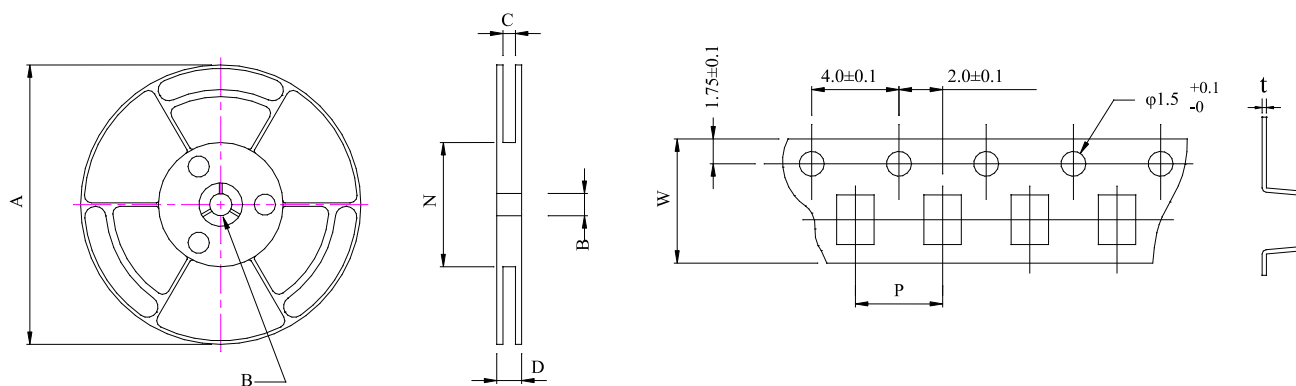


UNIT: mm

	A	B	C	D	N	P	W	t
DIM.	180	13.0	8.4	12.5	50	4.0	8.0	0.25
TOL.	MAX.	±0.8	+1.0-0	MAX	MIN.	±0.1	±0.2	±0.05

Quantity : 4,000 Pcs/Reel

8. Recommended Soldering Conditions

Typical RoHS Reflow Profile

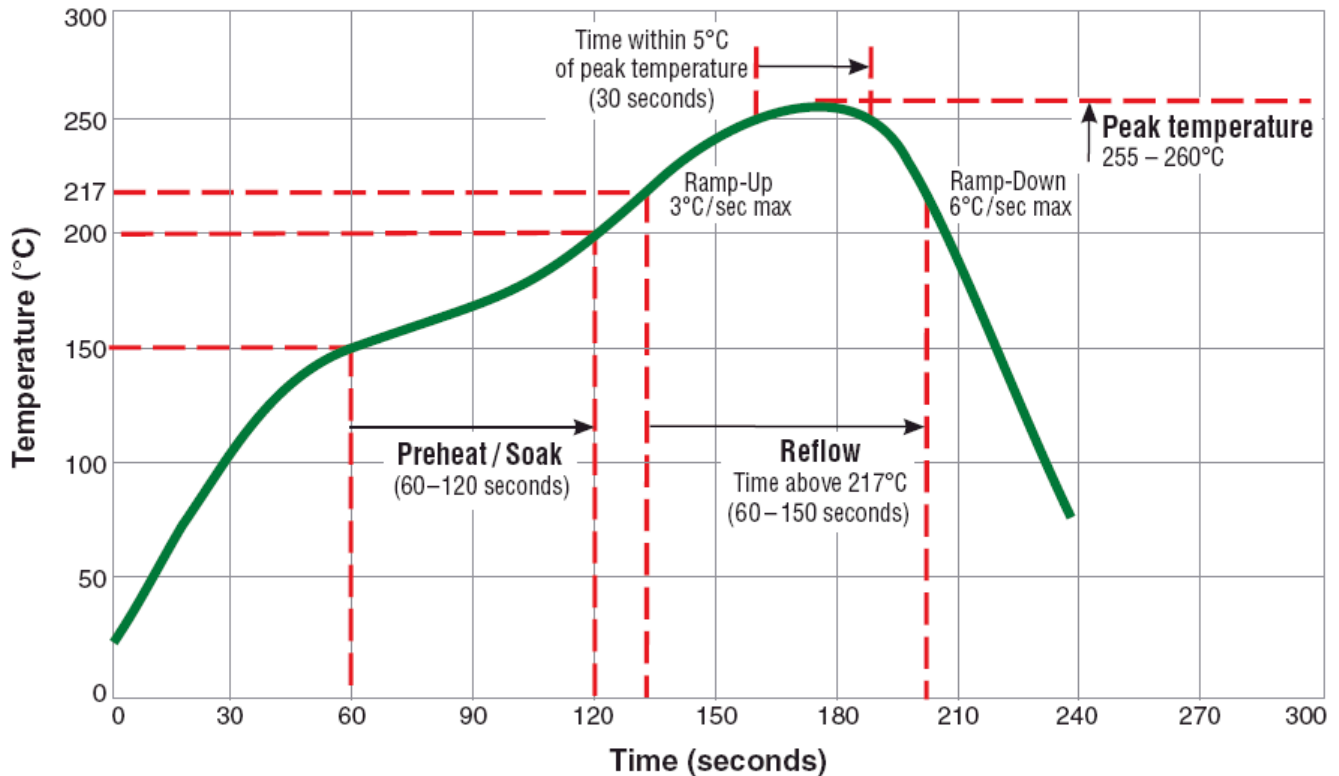

9. Note

- TOLERANCE: K = $\pm 10\%$ 、J = $\pm 5\%$ 、G = $\pm 2\%$
- INDUCTANCE AND Q MEASURED AN KEYSIGHT 4991B OR EQUIVALENT.
- SRF MEASURED USING AN KEYSIGHT 5071C NETWORK ANALYZER AND A INPAQ TEST FIXTURE OR EQUIVALENT.
- DC RESISTANCE MESASURED USING A MICRO-OHMMETER.
- CURRENT THAT CAUSES A 15°C TEMPERATURE RISE FROM 25°C AMBIENT.
- ELECTRICAL SPECIFICATIONS AT 25°C.
- OPERATING TEMPERATURE RANGE : -40°C TO +125°C.
- Storage temperature RANGE: Component: -40°C TO +125°C.
Tape and reel packaging: -40°C TO +80°C.
- MEAN TIME BETWEEN FAILURES (MTBF) 1 BILLION HOURS.
- MOISTURE SENSITIVITY LEVEL (MSL) 1 (UNLIMITED FLOOR LIFE AT < 30°C / 85% RELATIVE HUMIDITY).
- GRAPHIC IS ONLY FOR DIMENSIONALLY APPLICATION.
- THIS IS A RoHS AND REACH COMPLLIANT PRODUCT WHOSE RELATED DOCUMENTSS ARE AVAILABLE ON REQUEST.

:

10. Reliability Performance

Test Item	Accept criteria	Test Condition	Standard Source
High Temperature Exposure (Storage)	1.Change from an initial value L:within±5% 2.no visible damage.	1000 hrs. at rated operating temperature (e.g. 125°C part can be stored for 1000 hrs. @ 125°C. Same applies for 105°C and 85°C. Unpowered. Measurement at 24±4 hours after test conclusion.	AEC-Q200 RevD Table 5
Temperature Cycling	1.Change from an initial value L:within±5% 2.no visible damage.	1000 cycles (-40°C to +125°C). Note: If 85°C part or 105°C part the 1000 cycles will be at that temperature. Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme. 1 min. maximum transition time.	AEC-Q200 RevD Table 5
Biased Humidity	1.Change from an initial value L:within±5% 2.no visible damage.	1000 hours 85°C/85%RH. Unpowered. Measurement at 24±4 hours after test conclusion.	AEC-Q200 RevD Table 5
Operational Life	1.Change from an initial value L:within±5% 2.no visible damage.	1000 hrs. @ 105°C. If 85°C or 125°C part will be tested at that temperature. Measurement at 24±4 hours after test conclusion.	AEC-Q200 RevD Table 5
Mechanical Shock	1.Change from an initial value L:within±5% 2.no visible damage.	Peak Value: 100g's, Duration: 6ms, Waveform: Half-sine Velocity Change: 12.3ft/sec.	MIL-STD-202 Method 213 Condition C
Vibration	1.Change from an initial value L:within±5% 2.no visible damage.	5g's for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8"X5" PCB, .031" thick, 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.	AEC-Q200 RevD Table 5
Resistance to Soldering Heat	1.no visible damage.	Condition K: Reflow temp:250±5°C, Peak time: 30±5sec, Temp ramp: 1°C/s-4°C/s; time above 183°C, 90 s - 120 s, Cycles: 3.	MIL-STD-202 Method 210
ESD	1.Change from an initial value L:within±5% 2.no visible damage.	Passive Component Human Body Model (HBM) direct contact discharge 8KV.	AEC-Q200-002 Or ISO/DIS10605
Solder ability	1. Lead must have 95% above coverage.	SMD: a) Method B, 4hrs@155°C dry heat, @235°C	AEC-Q200 RevD Table 5
Flammability	1.Meet UL-94 V0 or V1 request	V-0 or V-1 Acceptable.	UL-94
Board Flex	1.Change from an initial value L:within±5% 2.no visible damage.	100mmX40mm board mechanical means to apply a force which will bend the board (D) x = 2 mm minimum, applied forces shall be 60 (+ 5) Sec.	AEC-Q200-005
Terminal Strenh (SMD)	1.Component can't drop 2.no visible damage.	1.8Kg force, applied for 60 second.	AEC-Q200-006