

DATA SHEET

PRODUCT **CHIP INDUCTORS**

SERIES WCA4532CP

PART NO. _____

DESCRIPTION _____

ISSUE DATE 2023/07/18

REVISION DATE 2023/07/18

REFERENCE NO. ENS000181270

RoHS COMPLIANCE ITEM

Disclaimer:


- This datasheet is downloaded from the Website of Walsin Technology Corporation, and Walsin Technology Corporation reserves all rights for modification content without further notification.
- All product, specification and data are subject to change without notice.
- Walsin Technology Corporation, its affiliates, agents, employees, and all persons acting on its or their behalf, hereby disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any product related information, including but not limited to product specifications, datasheets, pictures and/or graphics.
- Walsin Technology Corporation makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. It is the customer's responsibility to validate that a particular product is suitable for use in a particular application.
- To the maximum extent permitted by applicable law, Walsin Technology Corporation disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- If you have any questions, please contact our sales staff.

CHIP INDUCTORS Engineering Specification

1. Scope


- Ceramic core wire wound construction.
- High Reliability due to wire wound type construction.
- Inductance values from 82 to 1200 nH.
- Exceptional Q and high SRF special for high frequency applications..
- High reliability tests comply with AEC-Q200.

2. Explanation of Part Number

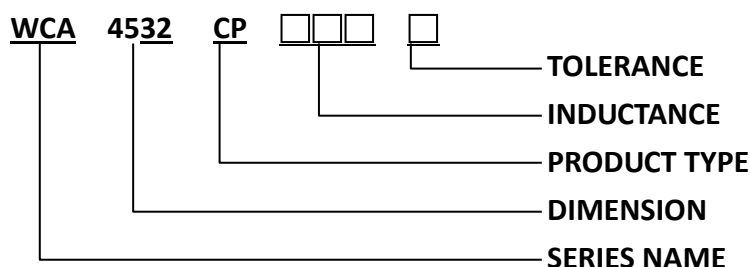


3. Shapes and Dimensions

UNIT:mm

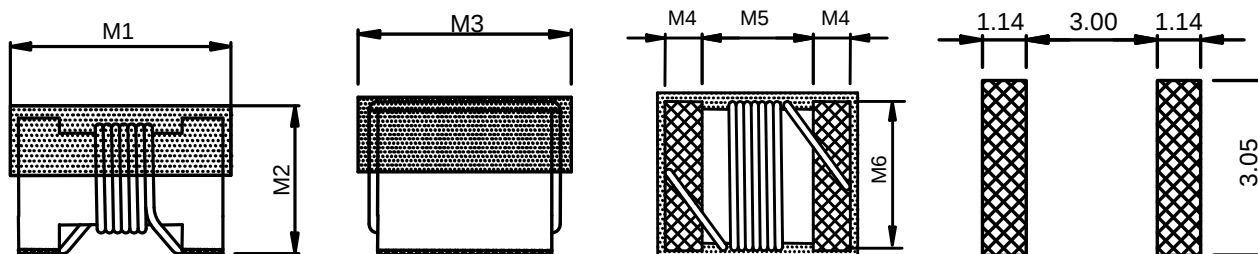

Series	M1	M2	M3	M4	M5	M6
WCA4532CP	4.95 MAX.	3.43 MAX.	3.81 MAX.	0.58±0.1	3.25±0.1	2.90±0.1

4. Marking



Marking Direction: PAD on the left and right sides, color code 1st and 2nd on the right, color code 3 multiplier on the left.

Example : WCA4532CPR18G

MARKING: Dots 1 and 2 indicate the inductance in nano Henries.

Example: DOTS 1: Brown=>1 , DOTS 2: Gray=>8

Dots 3 indicates multiplier. Brown=>10*10¹

MARK COLOR CODE IN COMPOSITE ELECTRICAL SPECIFICATION.



5. Electrical Specification

Part number	Inductance (nH) @50MHz	Inductance Tolerance	Q @50MHz TYP.	SRF (MHz) MIN.	DC Resistance (mΩ) MAX.	I _{rms} (mA)	COLOR CODE		
							1st	2nd	multiplier
WCA4532CP82NG	82	G	70	800	60	1500	Gray	Red	Black
WCA4532CPR10G	100	G	70	850	110	1150	Brown	Black	Brown
WCA4532CPR12G	120	G	70	800	110	1150	Brown	Red	Brown
WCA4532CPR15G	150	G	75	860	110	1150	Brown	Green	Brown
WCA4532CPR18G	180	G	80	850	110	1150	Brown	Gray	Brown
WCA4532CPR22G	220	G	80	700	105	940	Red	Red	Brown
WCA4532CPR27G	270	G	85	730	120	940	Red	Violet	Brown
WCA4532CPR33G	330	G	80	600	135	850	Orange	Orange	Brown
WCA4532CPR39G	390	G	80	600	140	850	Orange	White	Brown
WCA4532CP1R2G	1200	G	62	230	1200	480	Brown	Red	Red


NOTE:

1. □Tolerance: G:±2%
2. MSL: Level 1

6. Electrical Curve

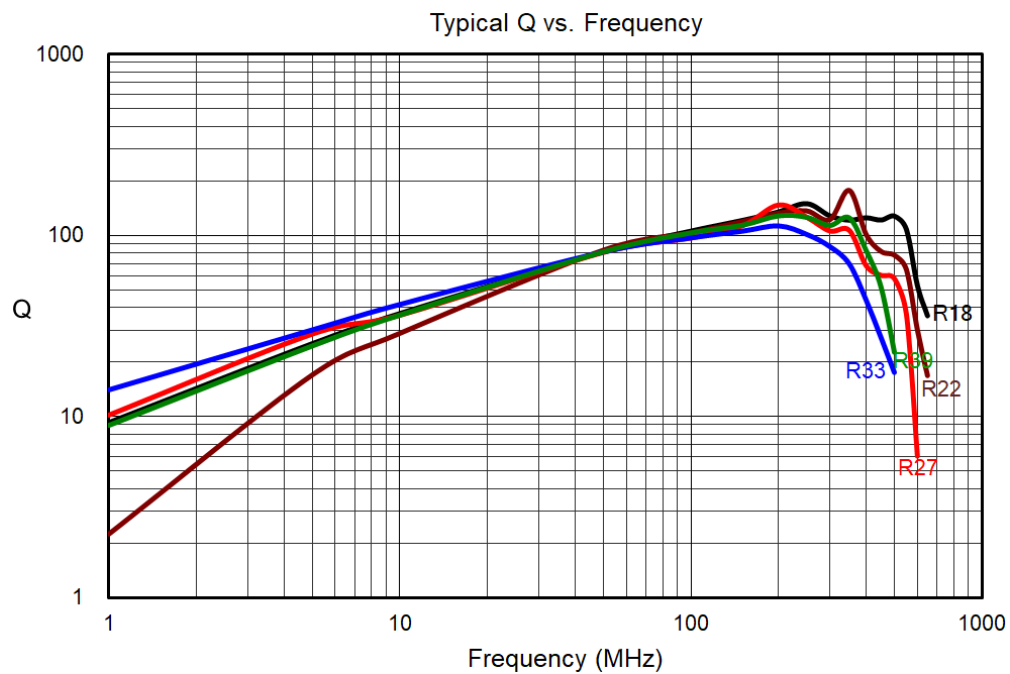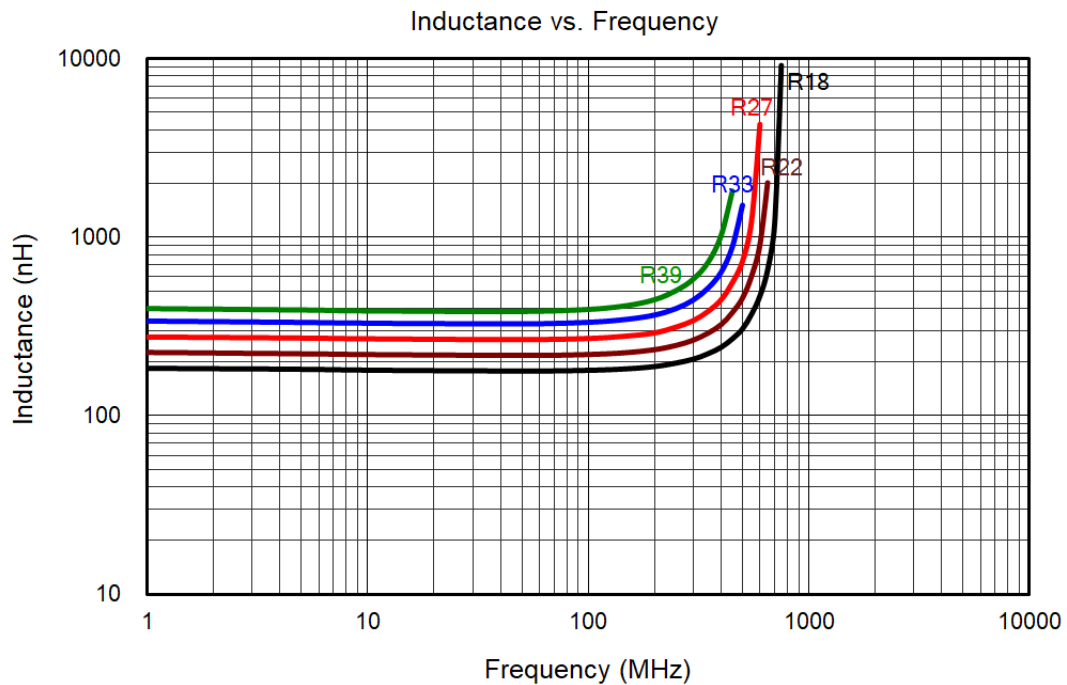


7. Packing

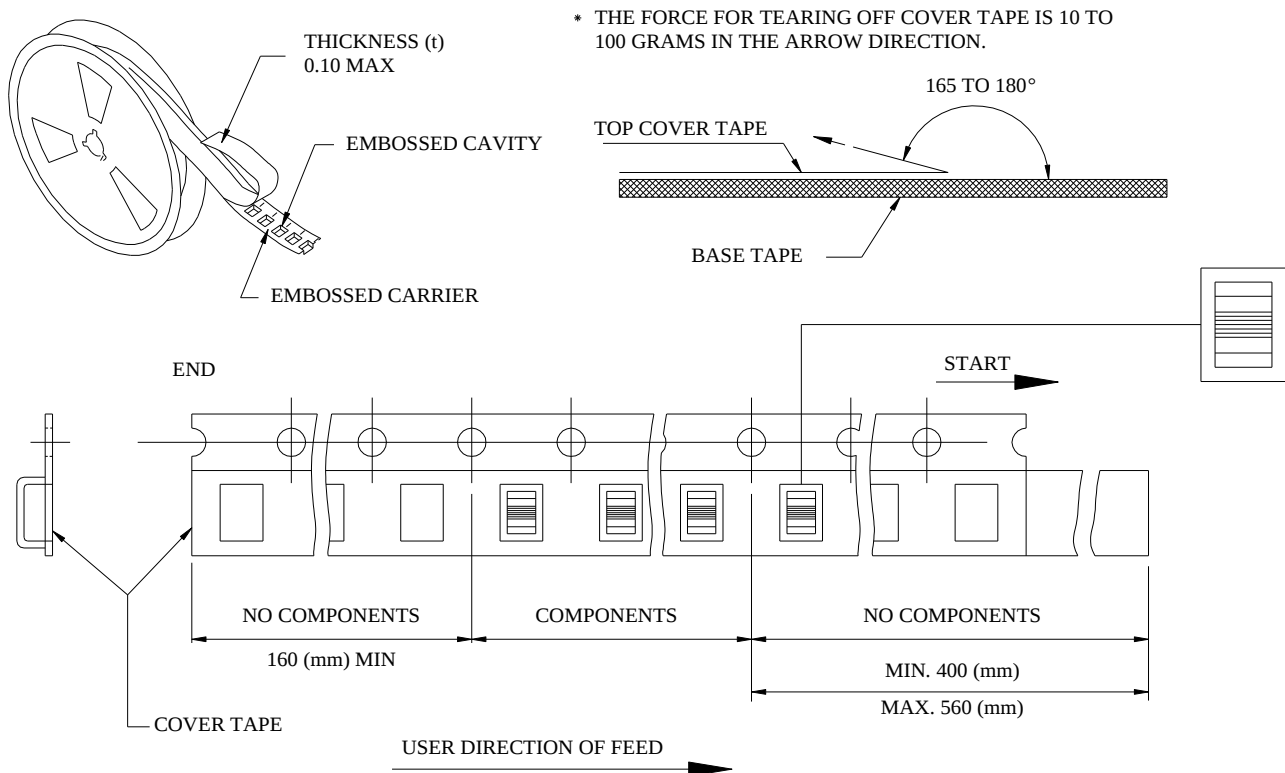


■ CARRIER TAPE REELS (mm)

MATERIAL: PLASTIC

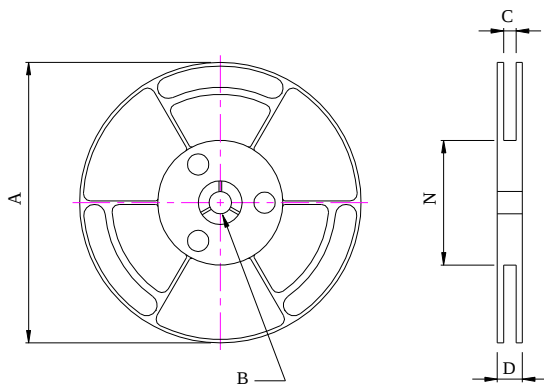

■ DIMENSIONS OF CARRIER TAPE (mm)

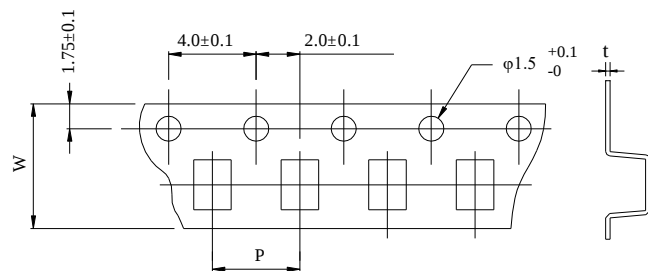


UNIT: mm

	A	B	C	D	N	P	W	t
DIM.	178	13.0	12.5	16.4	50	8.0	12.0	0.25
TOL.	MAX.	+0.5-0.2	+1.5-0	+1.5-0	MIN.	±0.1	±0.2	±0.05

Quantity : 600 Pcs/Reel

8. Recommended Soldering Conditions

Typical RoHS Reflow Profile

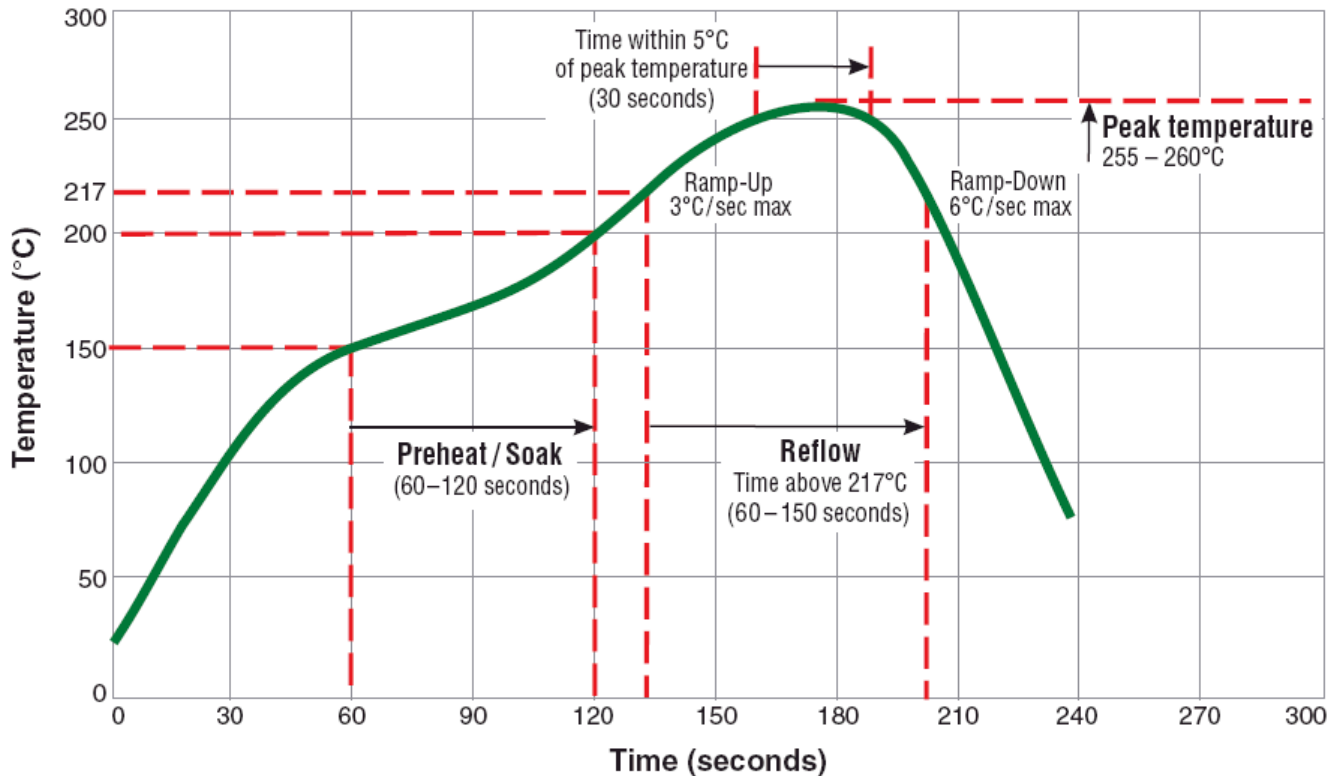

9. Note

- TOLERANCE: $G = \pm 2\%$
- INDUCTANCE AND Q MEASURED AN KEYSIGHT 4991B OR EQUIVALENT.
- SRF MEASURED USING AN KEYSIGHT 5071C NETWORK ANALYZER AND A INPAQ TEST FIXTURE OR EQUIVALENT.
- DC RESISTANCE MESASURED USING A MICRO-OHMMETER.
- CURRENT THAT CAUSES A 15°C TEMPERATURE RISE FROM 25°C AMBIENT.
- ELECTRICAL SPECIFICATIONS AT 25°C.
- OPERATING TEMPERATURE RANGE : -40°C TO +125°C.
- Storage temperature RANGE: Component: -40°C TO +125°C.
Tape and reel packaging: -40°C TO +80°C.
- MEAN TIME BETWEEN FAILURES (MTBF) 1 BILLION HOURS.
- MOISTURE SENSITIVITY LEVEL (MSL) 1 (UNLIMITED FLOOR LIFE AT < 30°C / 85% RELATIVE HUMIDITY).
- GRAPHIC IS ONLY FOR DIMENSIONALLY APPLICATION.
- THIS IS A RoHS AND REACH COMPLIANT PRODUCT WHOSE RELATED DOCUMENTSS ARE AVAILABLE ON REQUEST.

:

10. Reliability Performance

Test Item	Accept criteria	Test Condition	Standard Source
High Temperature Exposure (Storage)	1.Change from an initial value L:within±5% 2.no visible damage.	1000 hrs. at rated operating temperature (e.g. 125°C part can be stored for 1000 hrs. @ 125°C. Same applies for 105°C and 85°C. Unpowered. Measurement at 24±4 hours after test conclusion.	AEC-Q200 RevD Table 5
Temperature Cycling	1.Change from an initial value L:within±5% 2.no visible damage.	1000 cycles (-40°C to +125°C). Note: If 85°C part or 105°C part the 1000 cycles will be at that temperature. Measurement at 24±4 hours after test conclusion. 30min maximum dwell time at each temperature extreme. 1 min. maximum transition time.	AEC-Q200 RevD Table 5
Biased Humidity	1.Change from an initial value L:within±5% 2.no visible damage.	1000 hours 85°C/85%RH. Unpowered. Measurement at 24±4 hours after test conclusion.	AEC-Q200 RevD Table 5
Operational Life	1.Change from an initial value L:within±5% 2.no visible damage.	1000 hrs. @ 105°C. If 85°C or 125°C part will be tested at that temperature. Measurement at 24±4 hours after test conclusion.	AEC-Q200 RevD Table 5
Mechanical Shock	1.Change from an initial value L:within±5% 2.no visible damage.	Peak Value: 100g's, Duration: 6ms, Waveform: Half-sine Velocity Change: 12.3ft/sec.	MIL-STD-202 Method 213 Condition C
Vibration	1.Change from an initial value L:within±5% 2.no visible damage.	5g's for 20 minutes, 12 cycles each of 3 orientations. Note: Use 8"X5" PCB, .031" thick, 7 secure points on one long side and 2 secure points at corners of opposite sides. Parts mounted within 2" from any secure point. Test from 10-2000 Hz.	AEC-Q200 RevD Table 5
Resistance to Soldering Heat	1.no visible damage.	Condition K: Reflow temp:250±5°C, Peak time: 30±5sec, Temp ramp: 1°C/s-4°C/s; time above 183°C, 90 s - 120 s, Cycles: 3.	MIL-STD-202 Method 210
ESD	1.Change from an initial value L:within±5% 2.no visible damage.	Passive Component Human Body Model (HBM) direct contact discharge 8KV.	AEC-Q200-002 Or ISO/DIS10605
Solder ability	1. Lead must have 95% above coverage.	SMD: a) Method B, 4hrs@155°C dry heat, @235°C	AEC-Q200 RevD Table 5
Flammability	1.Meet UL-94 V0 or V1 request	V-0 or V-1 Acceptable.	UL-94
Board Flex	1.Change from an initial value L:within±5% 2.no visible damage.	100mmX40mm board mechanical means to apply a force which will bend the board (D) x = 2 mm minimum, applied forces shall be 60 (+ 5) Sec.	AEC-Q200-005
Terminal Strenh (SMD)	1.Component can't drop 2.no visible damage.	1.8Kg force, applied for 60 second.	AEC-Q200-006